

Tom 2 Pediatric Crib



Enhancing the patient experience


Benefits of Tom 2





Safety all around



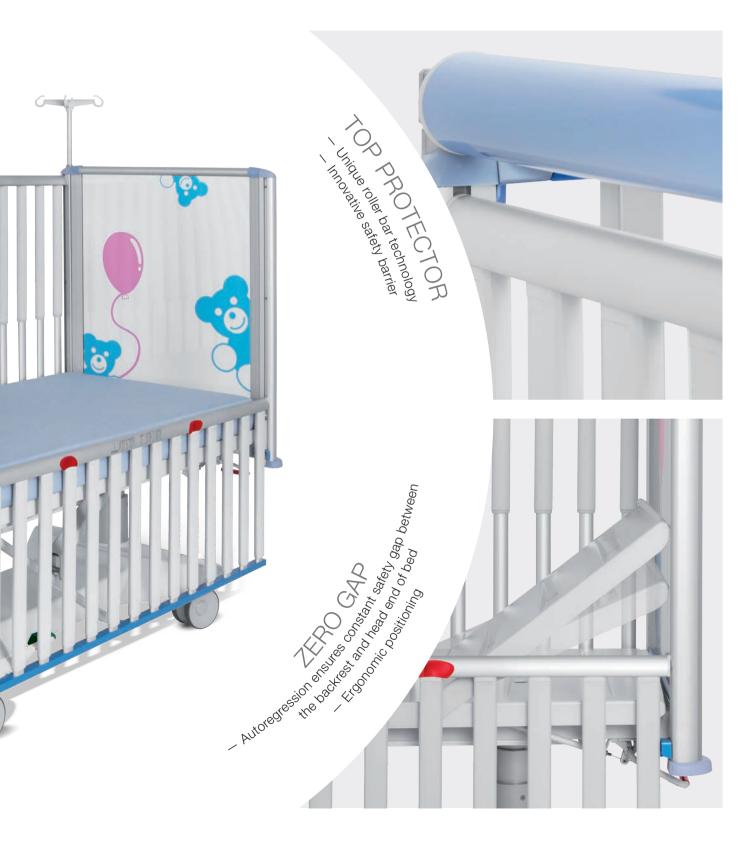

Enhanced patient



experience



UNIQUE MODERN DESIGN

The transparent bed ends provide the patient with a full view of surroundings, allowing parents and caregivers to have unobstructed visibility of the child.

Fully electric functionality allows caregivers to quietly operate the bed without disturbing the patient.

Colorful designs reflect the playful world of children and enhance their experience.



- PEACEFUL DREAMSFEELING OF SAFETY
- 0

- UNOBSTRUCTED VIEW

For care with a smile





UNIQUE TELESCOPIC SIDERAILS

- Best possible access to the patient
- 5 adjustable siderail height positions



■ 31.5 in Maximum SAFETY


Intermediate position

■ 15.7 in Better VIEW

Intermediate position

■ 0 in Easiest ACCESS

Safe space and clearance under siderails in lowest position.



SIDERAIL ACCESS

Siderail door allows easy access to pumps and lines when patient is sleeping.

Comfortable positioning



ELECTRIC POSITIONING

The bed's height, backrest tilt and TR/ATR position can be adjusted using the control panel. The GO button or STOP button ensure the safety locking of the bed against accidental movement.

Comfortable EXAMINATION

32.7 in

Safe BED EXIT

22.8 in

COLUMN CONSTRUCTION

This design ensures perfect stability, easy cleaning and unrestricted access to all parts of the bed.



Practical details

- Night light
- 2 Accessory holders
- 3 Accessory box
- 4 Accessory rails
- Integrated telescopic IV pole
- 6 Central brakes
- 7 Manual CPR
- 8 Control Panel





ELECTRIC PARAMETERS

Power supply	120 VAC, 50/60 Hz
Maximum input	max 1.6 A; 370 VA
Protection against water and dust	IPX4

CERTIFICATES

LINET® is certified according to European standards and the quality system: ČSN EN 9001:2009, ČSN EN 13485:2012

The Tom 2 bed fully complies with the new standard for hospital children's beds. DIN 32623:2009-11 and its construction guarantees perfect protection against children's falls. Other standards: EN 60601-1, EN 60601-1-2, EN 60601-1-6

TECHNICAL PARAMETERS

External dimensions	63 in × 32.6 in
Recommended mattress dimensions	56 in × 28 in x 4 in
Safe working load	165 lb (75 kg)
Mattress platform height (min-max) (electrically adjusted)	23 in – 32.7 in
TR/ATR tilt (electrically adjusted)	15°/15°
Max. siderails height	31.5 in
Autoregression of backrest	4 in
Section of mattress platform	2
Maximum gap between backrest and head end	1 in
Weight (depending on equipment)	264.5 lb (120 kg)
Clearance	5.1 in
Maximum backrest angle (electrically adjusted)	40°
Central castor control	YES







Tom 2

- Maximum patient safety
- Cheerful design



- Fully electrically operated bed
- Unobstructed access to the patient



- Management Exceptional modern design of children's bed
 - Increased level of pediatric care









Members of LINET Group

LINET Americas, Inc.

Address: 10420-R Harris Oaks Blvd., Charlotte, NC 28269

Phone: 877-815-9895 | Fax: 704-248-5655 | E-mail: info@linetamericas.com | www.linetamericas.com